


單位:mm

螺桿尺寸		鋼珠直徑	循環圈數	基本額定負荷(kgf)		螺帽 Dg6	鏈槽				剛性 kgf / μm
外徑	導程			(1x10 ⁶ REV.)			L	K	W	H	
				Ca(動負荷)	Co(靜負荷)						
16	5	3.175	3	765	1240	30	72	20	3	1.8	37
			4	860	1710		85	20	3	1.8	
20	5	3.175	3	1080	2050	34	87	20	4	2.5	35
			4	1380	2730		103	25	4	2.5	46
	6	3.969	3	980	2300	40	75	20	4	2.5	41
			4	1250	3070		85	20	4	2.5	54
25	5	3.175	3	1275	2740	42	87	20	4	2.5	42
			4	1630	3650		103	25	4	2.5	56
	6	3.969	3	1095	3060	48	75	20	4	2.5	51
			4	1400	4080		85	20	4	2.5	67
32	5	3.175	6	1980	6120	50	105	25	5	3.0	99
			3	1500	3750		87	20	5	3.0	52
			4	1920	5000		103	25	5	3.0	69
	6	3.969	6	2720	7500	52	127	32	6	3.5	101
			3	1820	4230		87	20	5	3.0	53
	8	4.762	4.762	4	2330	5640	56	127	32	5	3.0
3				2605	5310	109		25	6	3.5	55
40	10	6.35	4	3340	7080	65	155	32	6	3.5	72
			3	3010	7100		135	25	6	3.5	66
	5	3.175	4	1575	5290	54	85	20	4	2.5	81
			6	2230	7940		105	25	4	2.5	119
	6	3.969	4	2130	6410	56	103	25	5	3.0	83
			6	3020	9620		127	32	5	3.0	121
	8	4.762	4	2720	7620	60	127	25	5	3.0	85
			6	3850	11430		161	40	5	3.0	125
10	6.35	3	3010	7100	65	135	25	6	3.5	66	
		4	3850	9470		155	32	6	3.5	87	

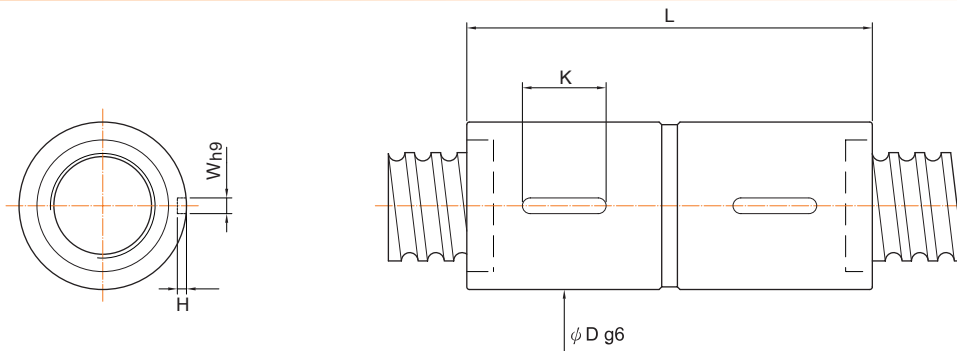

單位: mm

螺桿尺寸		鋼珠尺寸	循環圈數	基本額定負荷(kgf)		螺帽	鏈槽				剛性 kgf / μm
外徑	導程			(1x10 ⁶ REV.)			Dg6	L	K	W	
		Ca(動負荷)	Co(靜負荷)								
50	5	3.175	4	1730	6760	65	85	20	4	2.5	96
			6	2450	10140		105	25			141
	6	3.969	4	2380	8250	68	103	25	5	3.0	99
			6	3370	12380		127	32			146
	8	4.762	4	3010	9610	70	127	32	5	3.0	102
			6	4260	14420		161	40			149
	10	6.35	3	3430	9300	74	135	32	6	3.5	80
			4	4390	12400		155	32			105
	6	6.35	6	6220	18600	78	197	40	6	3.5	155
			3	4510	11150		161	40			82
4	7.938	4	5770	14870	78	185	40	6	3.5	107	
		4	5770	14870		185	40			107	
63	6	3.969	4	2610	10550	80	106	25	6	3.5	119
			6	3700	15830		130	32			176
	8	4.762	4	3375	12200	82	131	32	6	3.5	122
			6	4780	18300		165	40			180
	10	6.35	4	5020	16450	88	160	32	8	4.0	127
			6	7110	24680		202	40			188
	12	7.938	4	6580	19430	92	185	40	8	4.0	130
			6	9320	29150		238	50			192
80	10	6.35	4	5510	21200	105	160	32	8	4.0	154
			6	7810	31800		202	40			226
	12	7.938	4	7500	25700	110	185	40	8	4.0	159
			6	10620	38550		238	50			234
	16	9.525	3	9770	31700	115	200	40	10	5.0	136
			4	12510	42270		236	50			179
	20	9.525	3	9770	31700	115	245	50	10	5.0	136
			4	12510	42270		289	63			179